


Roller shade brackets must be LEVEL for the shade to roll up evenly.

### DUAL SHADES WITH 5" FASCIA

#### OUTSIDE MOUNT ONLY

Position the brackets at each end of the roller shade.


Brackets may be mounted to wall, ceiling, or window frame.

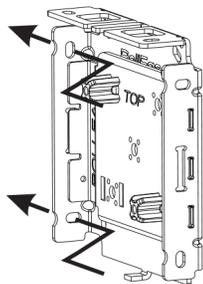

#### INSTALL THE SHADE

Install the shades beginning with the one in the upper position. (1)

With each shade, install the clutch end first, and then the idle end. Be certain to support the clutch end of the shade while the idle end is being installed, to prevent damage to the clutch.

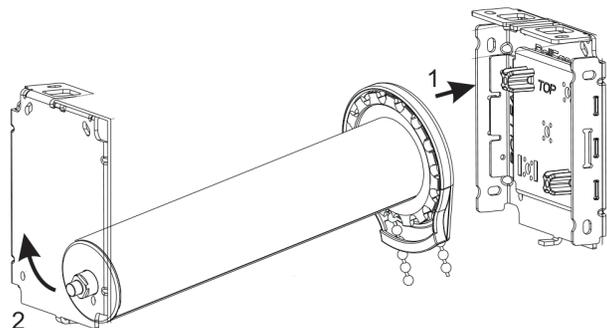

Install the second shade into the lower position. (2) Repeat steps.


The bottom of the clutch should always point straight down.

#### CHILD SAFETY

The tension device reduces the hazards of strangulation and entanglement of young children and pets by limiting access to the control loop.

The tension device must be installed to make the shade fully operational.

Pull tension device down until the chain is taut on both sides. Mark the upper screw hole, and using screws provided, install tension device with upper hole 3/8" above mark.

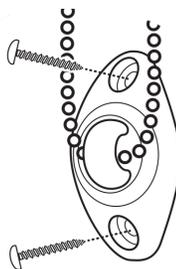


#### CHECK

Lower and raise the shades to confirm smooth operation including proper settings of the stops. Confirm control chains are routed properly. Check before and after installing tension devices.


#### ATTACH THE FASCIA

Attach the fascia by hooking the lip of the long side of the fascia panel onto the bottom front tab of the bracket. (Fig.3)

Swing the fascia panel up over the bracket and firmly press the top of the short side of the panel until the fascia engages (with a click) the center top tab of the bracket. (Fig.4)

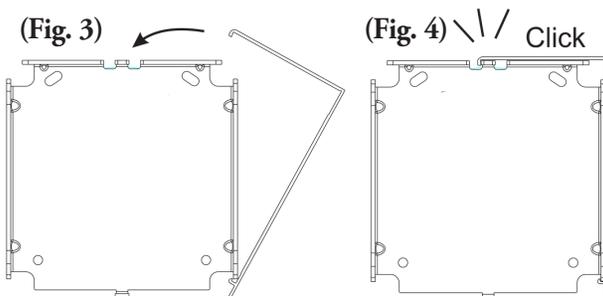

If using end caps, snap end caps over brackets and fascia.

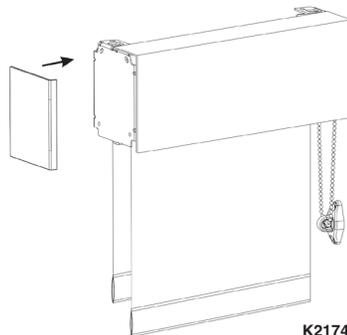

# DUAL ROLLER SHADES

## INSTALLATION & OPERATING INSTRUCTIONS

#### OPERATION

##### CLUTCH ROLLER

Continuous control loop offers precise shade positioning while the control remains the same length. Comes with tension device that must be mounted in order for the shade to operate.

##### MOTORIZATION

Control a single shade or a group of shades with one remote. Motorized shades install the same as a Clutch Shade or Shade with Fascia. See separate Remote Programming Guide for additional set up information.

#### QUESTIONS?

Call Vista's hotline for quick assistance.


800-726-3380

Roller shade brackets must be LEVEL for the shade to roll up evenly.


## VERTICAL BRACKET

### INSIDE MOUNT ONLY

The upper shade must be reverse roll (*fabric falls off the front of the roller*) and the lower shade needs to be standard roll (*fabric falls off the back of the roller*).

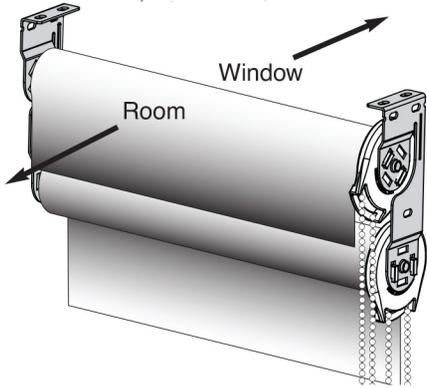

Attach the bracket to the inside window frame. Brackets are universal, so the clutch may be mounted on either side.

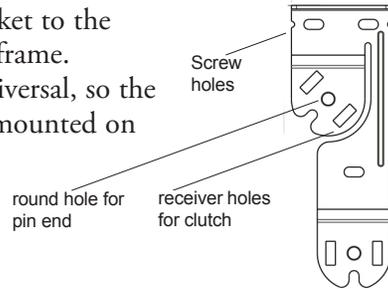

### INSTALL THE SHADE

Put the spring loaded pin into the round hole of the bracket.

Keeping the pin end secured in it's bracket, insert the hooks on the clutch straight into the receiver holes of the bracket. Gently pull down on the clutch until the two hook arms have locked securely to the bracket.

The bottom of the clutch should always point straight down.


## UNIVERSAL BRACKET

### INSIDE MOUNT

The upper and lower shades can be mounted in any combination of left or right control and standard or reverse roll.

When inside mount, it is recommended, that the upper shade be reverse roll for best coverage.

Attach the bracket to the inside window frame. Brackets are universal, so the clutch may be mounted on either side.

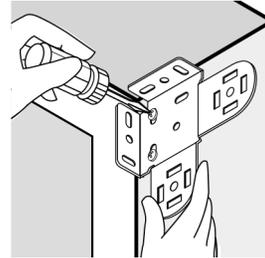


### INSTALL THE SHADE

Install the back shade into the lower part of the bracket (a). Put the spring loaded pin into the round hole of the bracket.

Keeping the pin end secured in it's bracket, insert the hooks on the clutch straight into the receiver holes of the bracket. Gently pull down on the clutch until the two hook arms have locked securely to the bracket.

Install the front shade into the upper part of the bracket (b). Repeat steps.

The bottom of the clutch should always point straight down. (Fig.1)

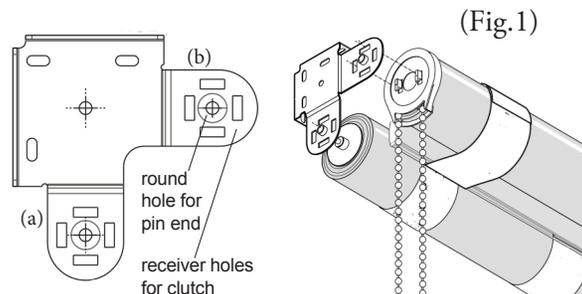


## OUTSIDE MOUNT

The upper and lower shades can be mounted in any combination of left or right control and standard or reverse roll.

When outside mount, bracket covers are included. (Fig.2)

Attach the bracket to the window frame, molding, or wall. Brackets are universal, so the clutch may be mounted on either side.

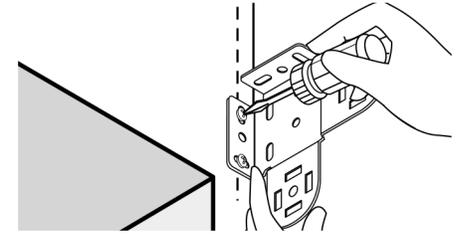

### INSTALL THE SHADE

Install the back shade into the lower part of the bracket (a). Put the spring loaded pin into the round hole of the bracket.

Keeping the pin end secured in it's bracket, insert the hooks on the clutch straight into the receiver holes of the bracket. Gently pull down on the clutch until the two hook arms have locked securely to the bracket.

Install the front shade into the upper part of the bracket (b). Repeat steps.

The bottom of the clutch should always point straight down. (Fig.1)

### INSTALL THE BRACKET COVERS

Slide the bracket cover over the bracket until snaps into place.

